


5TH WHEEL RV COVER INSTRUCTIONS

Accessories List



5th Wheel RV Cover x1



Tire covers x4



Extra long strap x1



Reinforced straps x2



Side buckle straps x7,
26-29ft/29-33ftSide
buckle straps x6



Front and End buckle straps x6



Gutter covers x6



Adhesive repair patch x1



Throwing bag x1



Storage Bag x1



Installation Instruction x1



Pre-Installation Checklist

- Accessories Classification: Remove all contents from the box for inspection; if you find missing parts or accessories please contact us via Amazon!
- Check for sharp areas on your RV. Rain gutters, air conditioners, side mirrors, etc. may cut, puncture, or cause excessive stress on the RV cover. Before installing the RV cover, you can minimize the risk of tears or punctures by padding rain gutters, ladders, and other corners subject to wear and tear.
- Make sure your RV is clean before covering it. Cleaning removes any debris and grit that could trap moisture or affect the surface of your RV. A clean RV won't transfer dirt to the covering, thus extending the life of the covering.



Safety and Maintenance

- Installation and removal are safer and easier when performed by two people.
- Avoid installing on windy days or when the roof is slippery.
- When installing the RV cover, please be cautious when working on the RV roof.
- When pulling the RV cover, avoid sharp objects blocking the RV cover and avoid companions on the roof.



- 1.** Put the rain gutter cover on the four corners. First, use the sponge ring inside the gutter cover to cover the rain gutter and fix it, then put on the gutter cover.






- 2.** With the tires cover, attach the wheel cover to the wheels of the RV and secure them with the elastic bands on the hooks.






- 3.** Spread out the RV cover evenly on the ground. (pic.1) Locate the red FRONT and BACK tags on the opposite ends of the RV cover.(pic.2)

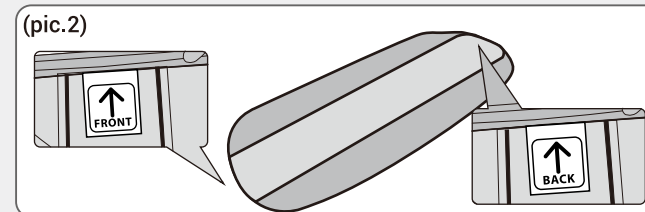

- 4.** When the RV cover is spread out, fold 1/3 over the top (pic.3), then the other 1/3 over the top (pic.4). Loosely roll up the RV cover from the BACK to the FRONT. (pic.5)




- 5.** Sweep the RV roof for debris before installation. (pic.6) Position the rolled-up cover on the front of the RV roof. (pic.7) Unroll the RV cover on the roof from front to back, Ensure the FRONT and BACK tags are on the corresponding sides of the RV.(pic.8)




6. Unfold the RV cover completely, drop down the RV cover and distribute the cover evenly. (pic.9/10/11)


(pic.9)




(pic.10)



(pic.11)




7. Attach the front and back straps then pull them tight. (pic.12) DO NOT over-tighten the straps.

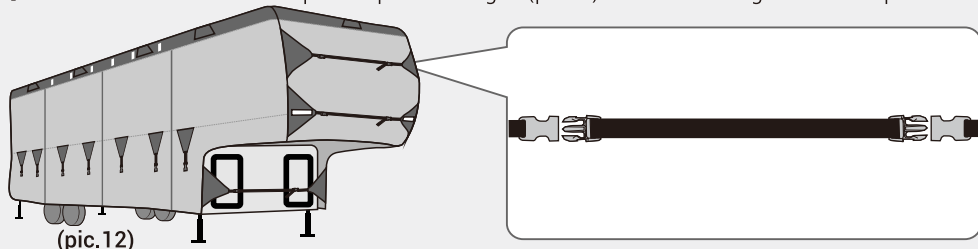


8. Take one end of the side straps and buckle it to the sewn buckle on the triangle piece on one side of the cover, connect the binding to the throw bag (Fig. 13), and throw the straps underneath the RV to the other side. (Fig. 14) Unfasten the throwing bag, fasten it to the other side of the triangle piece sewing buckle, and pull it tight. (Fig. 15) repeat the above steps for the other triangle piece buckles to secure the side straps.


(pic.13)



(pic.14)




(pic.15)




9. Throw the long reinforced strap over the camper (do not use it with the toss bag). After placing the long strap on the other side, attach the toss bag and throw it back under the camper on the other side (Fig. 17). Disconnect the toss bag and close the loop. (Fig. 18) Tighten the strap position. Repeat for the other long strap.


(pic.16)



(pic.17)




(pic.18)




10. In the end, connect the longest strap across the ribbon loop of the RV cover and secure it.

Installation complete.

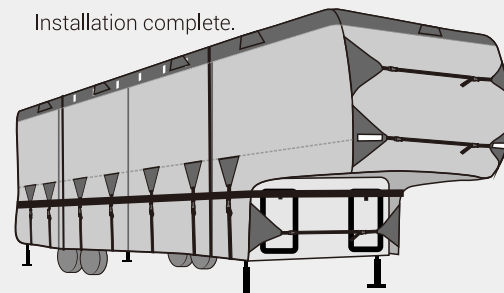


11. The package includes an RV cover repair patch for temporary repairs. You may cut off the repair patch, and attach them on both the inside and outside of the torn part comparatively. If the repair patch is insufficient, please contact us.

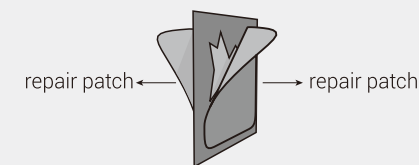


12. The RV cover comes with a long zipper. Use Velcro on the end seam to secure the zipper. (pic.19) For quick access, unzip the zipper panel near your RV entrance, roll up and use the Velcro at the top to secure the panel. (pic.20)(pic.21)


(pic.19)



(pic.20)



(pic.21)



Clean and Care

1. We suggest using a sponge with a mixture of detergent and water when cleaning your RV cover.
2. DO NOT machine wash the RV cover, or it might render the UV-resistance property useless.
3. DO NOT use a brush or complex objects to clean the cover.
4. Please ensure the RV cover is dry when folding it up for storage.

How to Remove Your 5TH Wheel RV Cover

To remove your 5TH Wheel RV Cover, simply reverse the how-to-install process above and return the cover back to the storage bag. To easily fit your cover in the storage bag, fold and roll it tightly rather than stuffing it.

Important: Do NOT store a wet cover in the storage bag or confined area as the cover can be damaged by mildew.