

RV COVER INSTRUCTIONS

Please Read the Instructions Thoroughly Before Operation

Caution

- DO NOT install the cover when it is windy or the roof is slippery.
- BE CAREFUL while stepping on the ladder or the RV roof.
- It is ideal to install the RV cover with two people.
- Please use rags or foam to cover and sharp edges on your RV that may potentially tear the RV cover.
- Remember to retract all antennas and disassemble any roof equipment with sharp edges.
- To prevent scratches on the RV, please ensure the RV roof is thoroughly cleaned before installing the RV cover.
- When installing the RV cover, please be cautious when working on the RV roof.

Before installation: Prepare your RV

- Please make sure the RV is clean and dry before installing the RV cover.
- Please check the RV for any sharp edges that may puncture the RV cover.
- Please cover the gutter spout with provided gutter covers before RV cover installation.
- Fold up the RV mirrors to ensure a snug fit.
- Keep the RV cover away from heat sources, like a stove or heaters.
- Turn off all electrical appliances before RV cover installation.



Installation:

1.Unboxing: Remove all content from the box for inspection, in case of missing parts, accessories, or defective productions, please contact us.

Parts list:

Item #	Description	QTY
1	Toss bag	1
2	Front and End buckle straps	4
3	Side buckle straps	4
4	Reinforced straps	2
5	Tire covers	4
6	Gutter covers	6
7	Jack cover	1
8	Ladder cover	1
9	Adhesive repair patche	2
10	Storage bag	1



2.Install the Four wheel covers onto the RV wheels and secure them with the elastic banding by the hook.

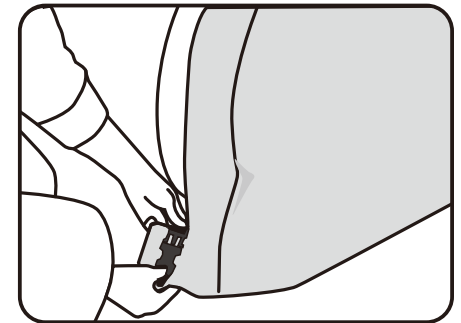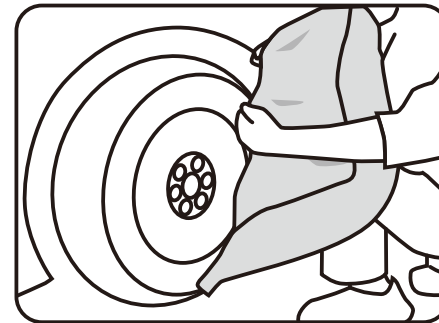


3.For the travel, place the jack cover the jack, then pull the stripe tight.



4. Please take the round foam out from the gutter cover and fit it onto the gutter spout. Put the gutter cover on and then secure it.

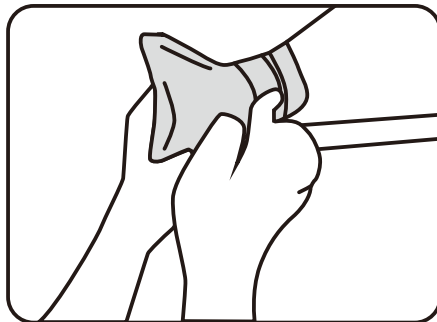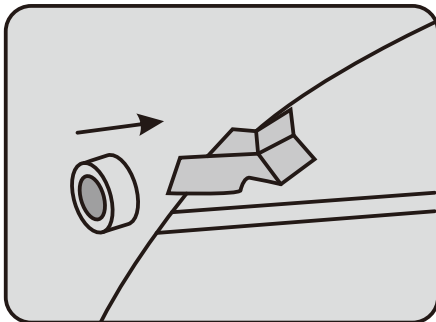


5. Spread out the RV cover evenly on the ground, locate the FRONT tags of the RV cover.






FRONT


6. Sweep the RV roof for debris before installation.

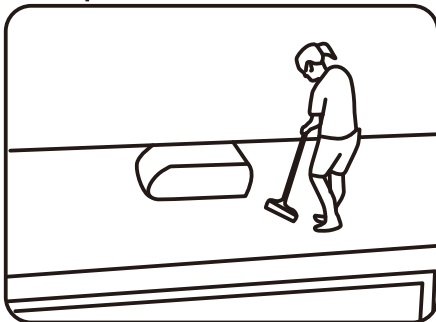


7. Ensure the Front tags are on the corresponding side of the RV. Unfold the RV cover completely, drop the RV cover and distribute the cover evenly.

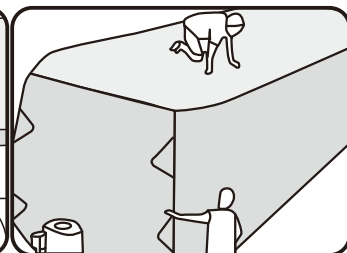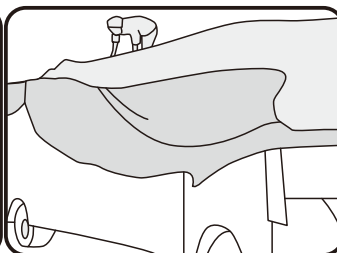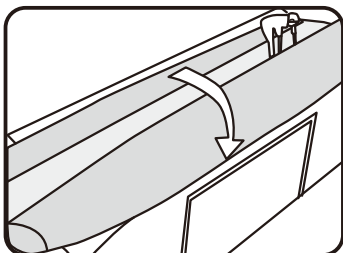

8. Attach the front and rear straps then pull them tight.

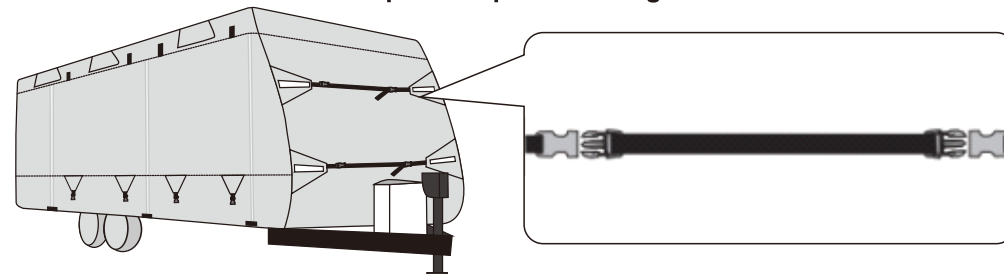


9. Connect the bottom strap with the toss bag, then toss the straps under the RV to the other side. Unsnap the toss bag, clip onto the other side, then pull it tight. Please repeat this operation for the other straps.

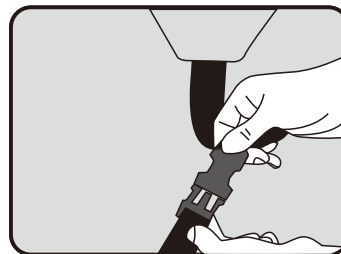

10. Toss the Reinforced straps over the RV, then connect the toss bag to the strap and toss it the other side under the RV, unsnap the toss bag, clip the buckle, adjust the strap location and pull tight. Repeat for the other Reinforced strap.

11. Installation complete.

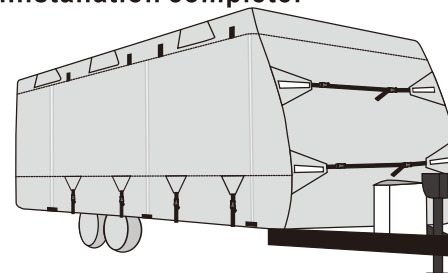

Clean and Care

- We suggest using a sponge with a mixture of detergent and water when cleaning your RV cover.
 - DO NOT machine wash the RV cover.
 - DO NOT use a brush complex objects to clean the cover.
 - Please ensure the RV cover is dry when folding it up for storage.
- If the cover has been poked a hole, please use the adhesive repair patche for repairing. You may cut off the repair patch, and attach them on the both inside and outside of the torn part comparatively.